



WLS30/WLSD30/30

Generation III Dryer



Features

- Capacity 30lb
- Stainless Steel Drum
- Easy Control
- Radax Technology
 - Maximum Heat Transfer
 - Low Energy Use
 - Fast Drying Time
- Large Door Opening

Options

- Coin Or Manual
- Reversing Drum
- Full Control – Flexible Programming
- Residual Moisture Control Sensodry
 - Humidity Detection in %
 - Safe Drying of Delicate Linen
 - Ideal Combination for Soft Wash
 - Ideal for Specialist Drying



WLS30 technical data

Programme	WLS30	WLSD30/30
Easy Control	Standard	Standard
Full Control	Optional	Optional

Load Capacity	WLS30	WLSD30/30
Drum Capacity	13KG (30LB)	2 x 13kg(30lb)
Drum Volume	285 Litres	2 x 285 Litres
Drum Diameter	760MM	2 x 760mm
Number of Drums	1	2
Number of Loading Doors	1	2

Electrical Supply	WLS30	WLSD30/30
Gas		
Electric	230V/50Hz – 400V3N/50Hz	
Steam		

Drum Rotation	WLS30	WLSD30/30
One Way Rotation	Standard	Standard
Two Way Rotation	Optional	Optional

Air Flow	WLS30	WLSD30/30
Air flow M3/h	Minimum 600	Minimum 600
Optimal 760	Optimal 760	
Exhaust Diameter	200MM	200MM


Heating Data Gas	WLS30	WLSD30/30
Heating Input	19.5KW	2 x 19.5KW
BTU's	66,500BTU's	2 x 66,500 BTU's
Gas Pipe Size (Inches)	¾"	2 x ¾"

Heating Data Electric	WLS30	WLSD30/30
Heat Input	18 KW	2 x 18KW
Electrical Load		
Amps Per Phase	32 Amps	2 x 32 Amps


Heating Data Steam	WLS30	WLSD30/30
Steam Pressure	3-6 / 7-10 Bar	3-6 / 7-10 Bar
Steam Connection (Inches)	¾"	2 x ¾"
Condense Drain Connection (Inches)	¾"	2 x ¾"

Weight	WLS30	WLSD30/30
Gross	265 KG	385 KG
Net	250 KG	370 KG


Dimensions	Height	Width	Depth	Height	Width	Depth
Unpacked	1675MM	795MM	1160MM	2030MM	795MM	
1240MM Packed		1785MM	855MM	1190MM	2120MM	880MM




Side




Back




WLSD30/30 Front

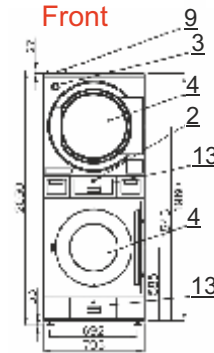

Side



Back



- | | | | |
|----|--|----|-----------------------|
| 1 | Programmer | 1 | - |
| 2 | Lock of the control panel | 2 | Control panel lock |
| 3 | Emergency stop button (not applicable for version with coin meter) | 3 | Emergency stop button |
| 4 | Lint screen cover | 4 | Door |
| 5 | Door lock microswitch | 5 | Name plate |
| 6 | Lint cover microswitch | 6 | Gas inlet |
| 7 | Lint screen | 7 | Main switch |
| 8 | Name plate | 8 | Main power supply |
| 9 | Main switch | 9 | Air outlet |
| 10 | Main power supply | 10 | Suction |
| 11 | Heating chamber | 11 | - |
| 12 | Gas valve (G models only) | 12 | - |
| 13 | Pressure regulator (G models only) | 13 | Lint screen cover |
| 14 | Gas supply (G models only) | | |
| 15 | Airflow switch | | |
| 16 | Exhaust piping | | |

Distributor

W Warwick Dryers Ltd

Head Office:
 Ashbank House, 1 Sadler Forster Way, Teesside Industrial Estate, Thornaby. TS17 9JY
 Tel: 01642 768 996 Fax: 01642 768 999
 Regional Office:
 1 Grice Street, West Bromwich, West Midlands. B70 7EZ
 Tel: 0121 553 0800 Fax: 0121 553 0888
 Email: info@warwickdryers.co.uk